



Manhole Cover VIATOP M NIVEAU 140 Class D400 height adjustable - Ventilated

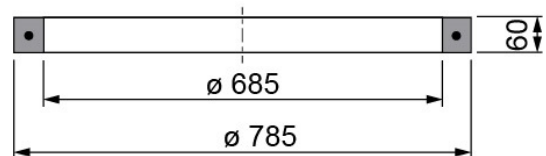

Viatop M supersedes all previous versions of CO 600mm Viatop manhole covers.

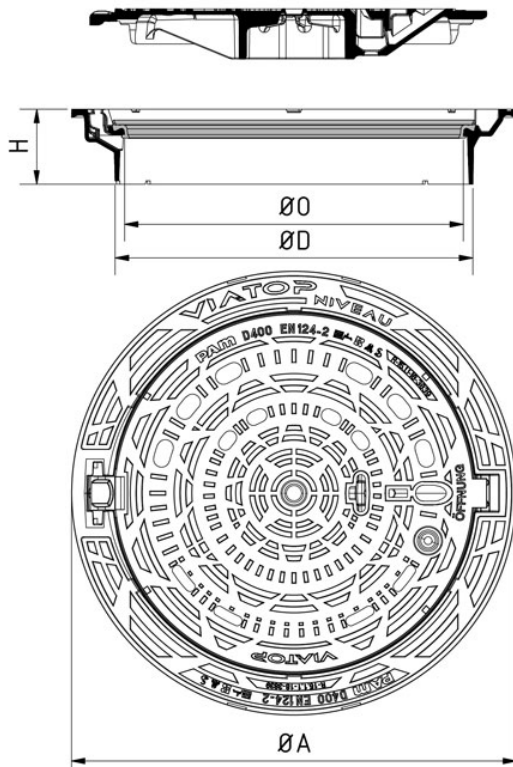

A	D	O	H	Total mass	Cover mass	Packaging	References
mm	mm	mm	mm	kg	kg		
830	670	610	140	81.5	47.3	5	CDVM60RGX40

Material and coating:

- Frame and cover in Ductile Iron EN GJS 400-15: water base coating
- Ring in elastomer

Field of application:

- D400 class (Group 4) according to standard DIN EN 124-2, carriageways of roads, hard shoulders and parking areas for all types of road vehicles.
- Heavy traffic zones and frequent visits.

		09/21/2022
		VD40REDVIA360

Main characteristics:

- 140mm-deep “floating” frame, height adjustable 160 up to 180mm
- Vertical frame bearing flange shape for perfect matching with surrounding road asphalt
- Wide frame flange bearing surface reducing load transmission to road asphalt
- Requires 60mm-high adapting concrete ring
- Continuous elastomeric gasket with, 2-directional disconnection between frame & cover
- Orientation of cover during installation is **not** traffic-direction sensitive
- Rated pedestrians’ slip-resistant chequer plate
- Hinged cover opens to 100° with safety blocking at 90°
- Hinged cover and ergonomic multi-tool handling box
- Cover fittable on any previous Viatop frames
- Available markings of fields of application: SW, RW
- Wide choice of cover customization locations & sizes (up to 80% of the surface) offered, consult sales organisations

Security

- Quarter turn locking system
- Mudpan for VIATOP Manhole covers
- Operating key C24

Complete presentation of Viatop downloadable [here](#).